



Note:  
For additional  
information  
see Section C-C  
on Sheet no. 5 of 13.

This portion of the  
backwall shall not  
be placed until the  
adjacent deck  
placement is  
complete.

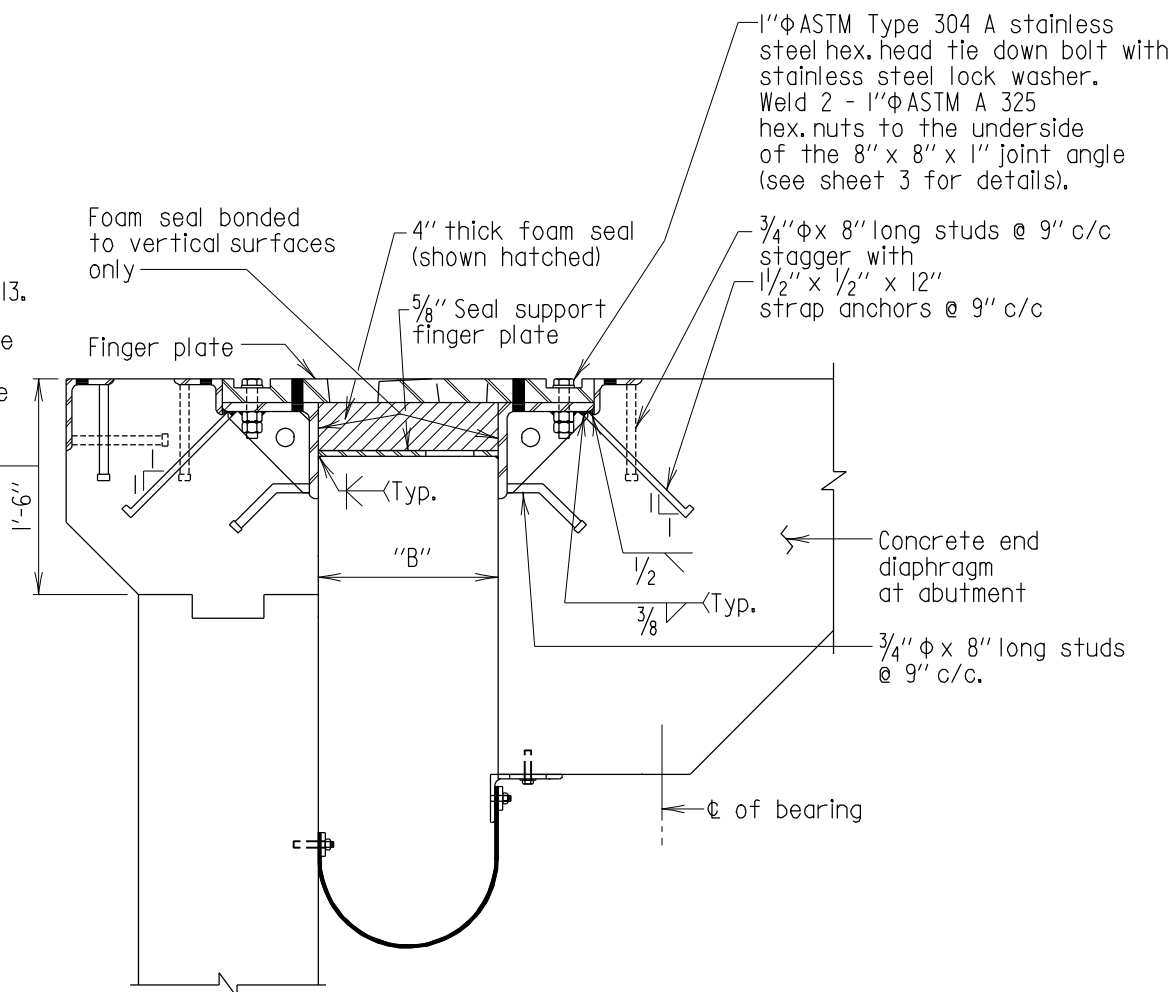

### SECTION B-B TYPICAL SECTION BETWEEN STRINGERS

Scale:  $\frac{3}{4}" = 1'-0"$

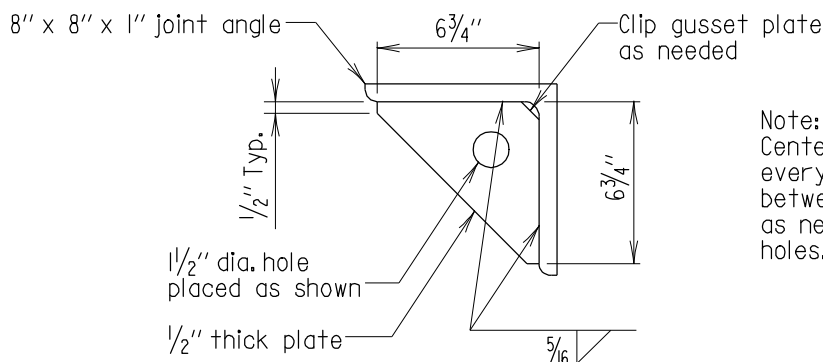

Note:  
Center gusset plate between  
every other tie down bolt  
between girders. Move plate  
as necessary to clear vent  
holes.

### GUSSET PLATE DETAILS

Scale:  $1\frac{1}{2}" = 1'-0"$

Notes:

1. For finger plate thickness and dimension "B", see Sht. No. 13 of 13.
2. For details of drainage trough, see Standard No. BR-SS(7.02)-79-64.
3. For details not shown see Sheet. no. 3 of 13.

APPROVAL	
<i>L. S. Friedman</i>	DIRECTOR
CHIEF ENGR. BRIDGE DEVL.	
DATE: 8/19/04	
REVISIONS	
SHA	FHWA
10-17-05	

FHWA APPROVAL  
DATE:

STATE OF MARYLAND  
DEPARTMENT OF TRANSPORTATION  
STATE HIGHWAY ADMINISTRATION  
OFFICE OF STRUCTURES

FINGER JOINT DETAILS (42" F-SHAPE PARAPET)  
FOR BRIDGES WITH STEEL STRINGERS  
WITH SKEW ANGLES BETWEEN 50° AND 90°

STANDARD NO. BR-SS(7.18)-04-321B

SHEET 4 OF 13

SUPER-ROADWAY JOINTS